


**NS-00006**

**Lewins Line**

## **NS-00006 Back Box**

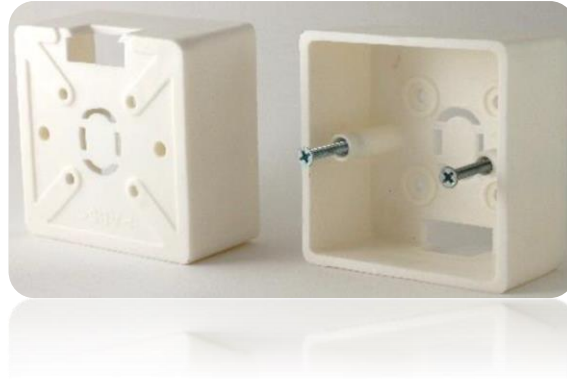

### **Product Classification**

**Portfolio**

**LEWINS-LINE®**

**Product Type**

**Back Box**

**Regional Availability**

**Asia | Australia/China |**



©2020 LEWINS-LINE, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of LEWIN-LINE. All specifications are subject to change without notice. See [www.Lewins-line.com](http://www.Lewins-line.com) for the most current information.

Revised: February 02, 2020

## ***Lewins Line***

### **Technical Information**

<b><i>Back Box Type</i></b>	<b><i>U/UTP Back Box</i></b>	
<b><i>Dimensions</i></b>	Depth	36.83mm   1.45 in
	Height	8.5mm   3.38 in
	Width	8.5mm   3.38 in
	Weight	0.05 KG   0.12 lb
<b><i>General Specifications</i></b>	Color	White
	Package Quantity	1
	Total Ports	2
<b><i>Mechanical Specifications</i></b>	Material Type	High-impact, flame retardant, thermoplastic

### **Regulatory Compliance/Certifications**

**Agency**                      Classification

**ISO 2017**                      Designed, manufactured and/or distributed  
under this quality management system.



## ***Lewins Line***

### **Feature/Regulatory Compliance/Certifications**

- ❖ Complies with TIA/EIA 568B.2-1 and ISO/IEC 11801 standards
- ❖ Through the continuous impedance analysis of the pin, terminals, and printed circuits, the best impedance matching relationship is achieved;
- ❖ Pin with gold plating to prevent surface oxidation, improve contact performance, and ensure performance and service life.
- ❖ Using high-quality flame-retardant polycarbonate material, flame retardant performance reaches UL94V-0 level.
- ❖ Supports mainstream termination methods to ensure universal connectivity and reliability of connections.
- ❖ Tool-less rotary threading, novel design, simple, beautiful, and compact.

